


# MODEL: ADLT6035

# ADL Spa Electronic Touch

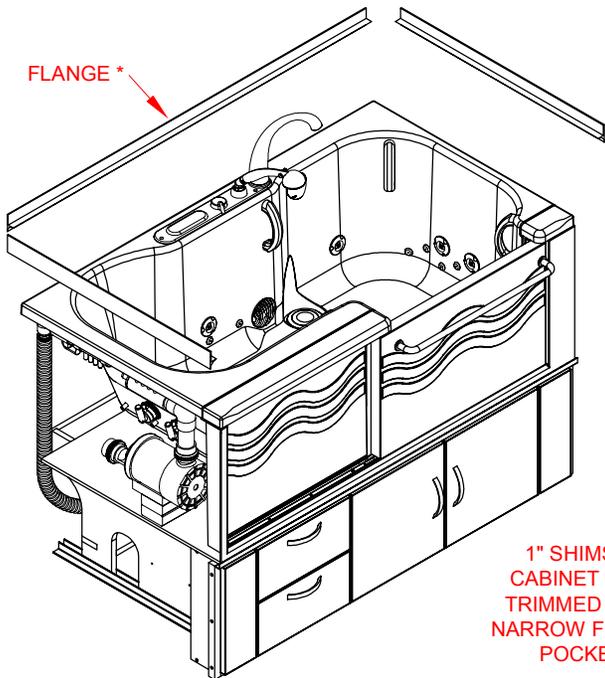


**PERSPECTIVE VIEW - N.T.S.  
MODEL SHOWN HERE AS:  
RIGHT DRAIN  
RIGHT DOOR OPENING  
RIGHT HAND UNIT**


## Features:

- Slide-in-entry bathtub with sliding door
- All Electronic Touch Control System (no levers) for: high-flow  $\frac{3}{4}$ " valve fill, thermostatically controlled fill temperature, diverter to hand held shower, and water and air jet systems
- Extra deep for a full body soak
- Allows you the freedom to rehab at home
- 7 jet hydromassage water jet system with Syllent brand pump
- 14 jet heated air jet system
- Ozone sanitation for water jet system
- Unique sliding door with automatic safety latch
- Right or left door opening available
- 2" quick-drain system included
- Ergonomic deck-mounted drain control lever
- 60" x  $\frac{3}{4}$ " hot and cold supply lines provided
- Limited lifetime warranty

*We reserve the right to make revisions without notice in the design of fixtures or in packaging unless this right has specifically been waived at the time the order is accepted.*

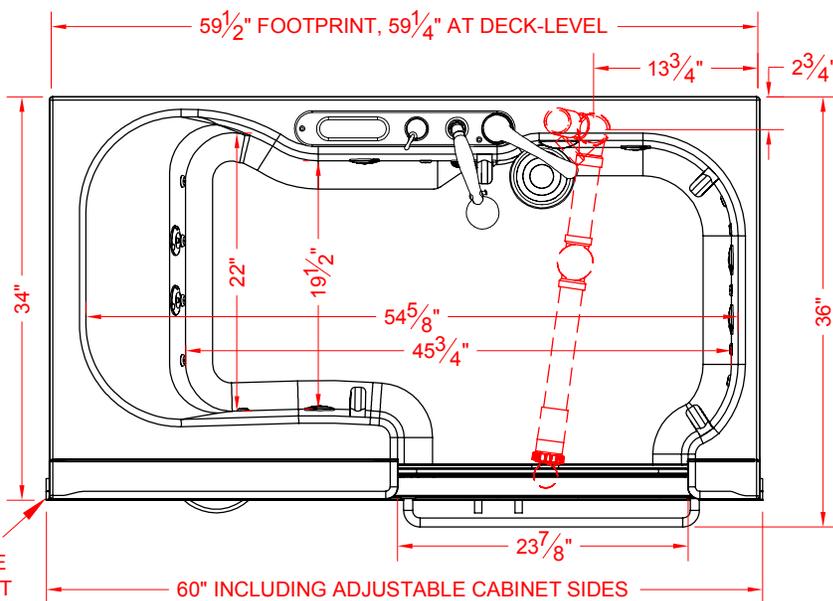

**TOP VIEW - SCALE  $\frac{3}{4}$ " = 1'-0"**

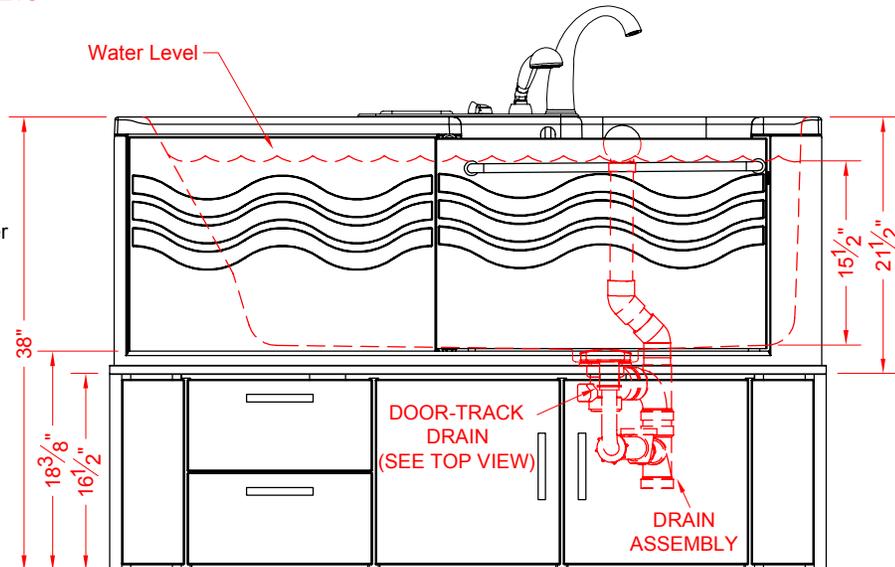

**FRONT VIEW - SCALE:  $\frac{3}{4}$ " = 1'-0"**

## PRODUCT SPECIFICATIONS:

- Sliding Door bathtub with pressure sealed door shall be of gelcoat fiberglass construction and have a matching access panel for access to plumbing and electrical components.
- Rough-In: Stud opening +1/4" -0" Nominal Dimensions. **\*\*NOTE:** 3/4" hot and cold supply lines are recommended to reduce fill time.
- C.S.I. FORMAT SPECIFICATION TEXT AVAILABLE

## PRODUCT INFORMATION:

- Accessories: Factory installed safety handle bars and Electronic Touch Valve System keypad plate; all others installed by others.
- Standard color is white with a white cabinet base.
- Additional tub gelcoat and sprayable solid surface colors are available as an upgrade, and a selection of 12 wood-grain cabinet faces can be special-ordered.
- Average volume with 170 lbs. bather: 45 gal. (12" deep)
- Max. volume with a 170 lbs. bather: 60 gal. (15-3/4" deep)
- Hot water heater recommendation 60-70 gallon
- Tub weight, dry, approx. 262 lbs., shipping wt. 345 lbs.
- Total weight of tub, bather, and water: approx. 932 lbs.
- Power Requirements:**
- Water jet system 120V/15A (draws 9.4A)
- Air jet System 120V/15A (draws 9.5A)
- Ozone Generator 120V/15A (draws 0.4A)
- Water Pump - US: Syllent MB71E0032AS/UL
- CAN: Syllent MB71E0032AS/UL-M
- Air Pump - US/CAN: CG Air SLO-3-75-120/60A-N
- Suction Fitting: CG Air SUC-S

## ACCESSORIES:

- STANDARD:**
- Electronic Touch Control  $\frac{3}{4}$ " valve system
- Water and air jet systems
- Ozone sanitation for water jet system
- Lever-operated 2" quick-drain kit
- Safety assist bars
- White cabinet base
- \* Plastic nail flange material for alcove install
- OPTIONAL:**
- Two or three wall surround
- Grab bars for installation on wall surround
- Wood grain cabinet base upgrade
- Harness and seat strap system
- Ergonomic door latch extension handle

## PRODUCT COMPLIANCE:

- Designed, manufactured, and listed in compliance with the following:
- STANDARDS**
- CSA B45.5-11/IAPMO Z124-2011 - Plastic showers and bathtubs
  - ASME A112.19.7/CSA B45.10-2012 - Whirlpool bathtub appliances (when applicable)
  - ASME A112.19.15-2012/CSA B45-2002 - Whirlpool bathtubs with pressure-sealed doors
  - UL 1795 Hydro massage bathtubs (when applicable)
- CODES**
- Uniform Plumbing Code (UPC®)
  - National Plumbing Code of Canada
  - International Plumbing Code (IPC®)
  - Uniform Swimming Pool, Spa, and Hot Tub Code (USPC®) (when applicable)



BEST BATH SYSTEMS, INC.  
www.best-bath.com 1-800-727-9907